







MULTIFUNCTION



OUALITY



d-COLOR MF222 MF282 MF362 MF452 MF552

An innovative range of easy-to-use multifunctional colour devices offering outstanding performance and care for the environment. Designed and developed to meet professional document management requirements of different job types in a modern office environment.

DIGITAL MULTIFUNCTIONAL SYSTEMS

PRINT SPEED OF UP TO 55 PPM IN COLOUR AND MONO
INTEGRATED PRINT CONTROL WITH PCL6, PS3, XPS AND OFFICE OPEN XML
DIRECT PRINT AND MOBILE PRINTING OPTIONS
9" CAPACITIVE COLOUR MULTI-TOUCH DISPLAY
REMOTE PANEL CONTROL ACCESS VIA THE WEB
INNOVATIVE I-OPTIONS TO ENABLE ADVANCED FUNCTIONS

d-COLOR MF222 MF282 MF362 MF452 MF552

INNOVATIVE AND INTUITIVE TO USE

With the introduction of the new "d-Color A3 Range", Olivetti has provided a complete line of products based on a shared philosophy and functionality. The d-Color MF222, d-Color MF282, d-Color MF362, d-Color MF452 and d-Color MF552 deliver high quality prints at 22/28/36/45/55 ppm, respectively, whether in colour or mono. With 600 x 1,800 dpi ConTone quality for printing DTP documents and 1,200 x 1,200 dpi quality for printing fine line detail, maps, drawings and small fonts.

Using the advanced functionality of the new range is easy. The innovative 9-inch Capacitive Colour Multitouch Display adopts "Flick and Drag" technology, similar to the operation on today's smartphones and Tablet PCs. The menu screen provides direct access to Scan, Fax (option), Box (archive) and Copy. When selecting additional functions, they appear in pop-up windows, thereby keeping the main panel both visible and available. This eliminates lots of sub-menus, so the user doesn't get lost when selecting additional functions. In effect, this panel becomes the access point for the functions of the machine guiding the user in the generation / sharing / archiving of the company's **document flow**. The menu can be customised to make processes more automatic: short cuts to functions can be created using a selected key or actions can be condensed into a single keystroke by saving macros.



Capacitive 9.0" control panel



Advanced security options and authentication systems



VERSATILE COMMUNICATIONS PLATFORM

The new "d-Color A3 Range" offers high-speed scanning at up to 80 ipm (images per minute), with the optional DF-624 Document Feeder installed, and up to **160 ipm** when using the optional (standard with the d-Color MF452 and d-Color MF552) DF-701 Dual-scan Document Feeder. When combined with the new **Scan Preview** function, the scanned job can be checked as thumbnails on the Colour Multi-touch Display post scanning, you can then delete pages, rotate pages and change basic settings before the scanned job is sent.

The following Scan-to functions are available: Email (Me); SMB (folder on your PC); FTP (server); Box (archive folder) and direct to USB Memory Stick. You can save in the following file formats: JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; PPTX (PowerPoint); XPS and Compact XPS. The standard controller can also be upgraded to support advanced PDF scanning options including a PDF/A (1a and 1b) format that meets with legal archiving requirements and Scan-to Searchable PDF (OCR). Other options include Barcode font printing and Unicode print support (for SAP printing applications).

DIRECT PRINT AND MOBILE PRINTING

For direct printing, the new "d-Color A3 Range" support PDF; XPS; TIFF, JPEG and OOXML (Office Open XML including docx/xlsx/pptx) file formats, so it is possible to print directly via a Web Browser Utility without using a Print Driver, or print directly via a Memory Stick. In addition, mobile devices such as smartphones and tablets can print directly to these models via a Mobile Printing App (Wi-Fi network connection environment and Wi-Fi Router required / Bluetooth MFP option also available for Mobile Phone users).

REMOTE PANEL CONTROL ACCESS VIA THE WEB

Remote Panel facilitates remote access to the Colour Multi-touch Display by the administrator via a standard Web Browser. This capability brings new levels of client support where the user can be assisted remotely in how to use features of the machine. Remote Panel also allows the administrator to change the administrative settings of the machine remotely. In addition, to help maximise machine up-time, it is also possible for Authorised Service Providers (requires your access permission) to provide service support for certain aspects of the MFP remotely.



Direct printing and scanning via USB for direct management of Microsoft Office formats





EXCELLENT MEDIA CAPABILITY

All models have excellent media capabilities supporting up to 256 g/m² from any paper tray and via the Automatic Duplex too. Paper Tray 2 can also support up to 500 sheets of SRA3 paper (320 mm x 450 mm). The bypass can feed Banner paper up to 1.2 meters in length providing you with the in-house flexibility of producing impactful local signage and posters.

Another useful feature is "Carbon Copy" mode. This allows you to print the document on to different media (e.g. different coloured paper) from your selection of multiple paper trays. Effectively, this removes the need to print via needle printers on to carbon paper.

EXCELLENT FINISHING

When you add the optional on-line finishing capabilities, it is easy to create 20 pages (80 images) booklets with an automatic crease-fold and saddle-stitch, with a front cover of up to 209 g/m², providing professional looking B2B documents for your clients. Other optional finishing functions include Tri-fold of an A4 page into DL size ready for posting and 2 or 4 hole-punching.


IMPRESSIVE ECO PERFORMANCE

Impressive energy-saving and Eco- friendly features:

- 3 Watt Sleep / 0.5 Watt ErP Power Save Mode
- Low Typical Energy Consumption (TEC) value far below the limits set by Energy Star
- Blue Angel Award
- Dynamic Eco-Timer analyses machine usage and regulates Sleep timings automatically
- Super-fast warm-up time maximising productivity
- Polymerised Toner lowering Fusing temperature

FINISHING OPTIONS Two-hole Four-hole 2-point Corner Booklet Letter fold stapling punching punching A4-DL Size d-Color MF55 Offset Duplex Combined Sheet Banner printing mixplex / (1.2 m) insertion. sortina report mixmedia Impressive finishing capabilities when options are added from the extensive range of accessories

OPTIONS

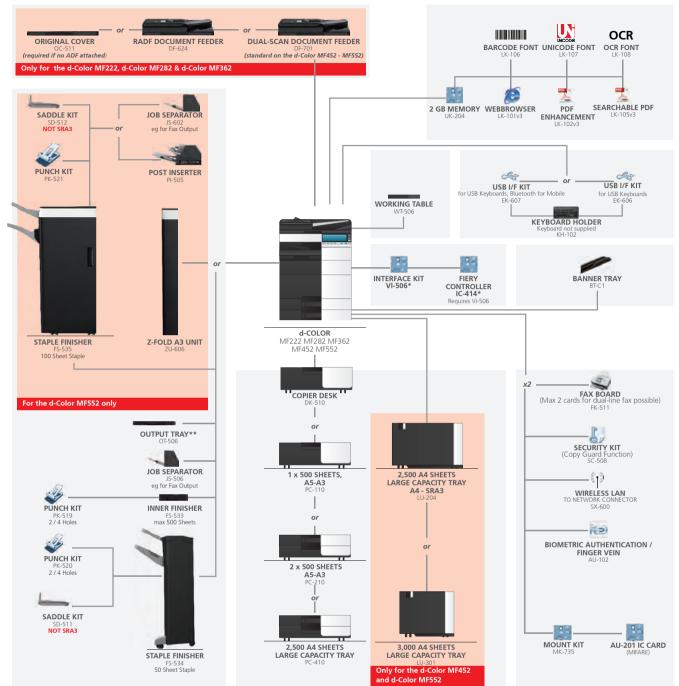

* Not available for the d-Color MF222

** Required for the d-Color MF452/d-Color MF552 when no finisher is attached



d-Color MF222- MF282 - MF362

Contraction of the second seco

d-Color MF452 - MF552

TECHNICAL FEATURES

| COPIER | d-Color MF222 | d-Color MF282 | d-Color MF362 | d-Color MF452 | d-Color MF552 |
|--|--|---|--|--|--|
| A4 Copy/Print Speed ppm | 22 | 28 | 36 | 45 | 55 |
| (mono & colour; single & duplex) | | 4.4 | 10 | 22 | 27 |
| A3 Copy/Print Speed ppm (mono & colour; single & duplex) | 14 | 14 | 18 | 23 | 27 |
| Output Time in Seconds | 6.9 | 5.9 | 5.3 | 4.6 | 4.1 |
| 1st Copy/Print (mono) | 0.5 | 5.5 | 5.5 | 4.0 | 4.1 |
| Output Time in Seconds 1st Copy/Print (colour) | 8.3 | 7.7 | 6.9 | 5.5 | 4.6 |
| Printing Process | Electrostatic laser copy, | Tandem indirect | | | |
| Foner Type | Polymer toner | landeni indirect | | | |
| Warm up Time in seconds | Approx 20 - d-Color MI | F222, d-Color MF283, d-Co | olor MF362; | | |
| | Approx 25 - <i>d-Color Mł</i> Approx 22 - <i>d-Color Mł</i> | | | | |
| Copy Resolution | 600 x 600 dpi | | | | |
| Gradations | 256 gradations | | | | |
| Original Format | A5-A3 | | | | |
| Enlargement | 25-400 % in steps of 0 | | | | |
| Copy Function | Cover Insertion, Test Ru | ın (print and display), 30 Pr | rogramme Memories, Image | e Repeat, Overlay, Waterma | arks, Stamps, |
| | Copy Protection, Account Track / Department Control (1,000) | | | | |
| PRINTER | | | | | |
| Print Resolution | 1.800 x 600 dpi / 1.200 |) x 1.200 dpi (for line-dra | wings & maps) / Max. prin | table area = 307 mm x 443 | 3 mm |
| Controller CPU Type | | | / MPC8536 @ 1.0GHz (d-C | | |
| 21 | | (d-Color MF452/d-Color N | | | |
| Page Description Language | PCL 6c (PCL 5c + XL3.0), PostScript 3 (CPSI 3016), XPS | | | | |
| Operating Systems | Windows 2000/XP/XP64, Windows VISTA 32/64, Windows 7 32/64, Server 2003/2003 x 64/2008/2008 x 64/200 (R2) | | | | |
| | Macintosh 9.x /10.x Unix / Linux /Citrix | | | | |
| Printing Fonts | 80 x PCL Latin; 137 x PostScript 3, Emulation Latin | | | | |
| | | | | | |
| Printing Functions | | PS, TIFF, XPS, PDF and end | | , | 2. · · · · · |
| Printing Functions | | | crypted PDF files, Mixplex, " oution Numbering, Number | , | 2. · · · · · |
| | | | | , | 2. · · · · · |
| SCANNER | & Cover Insertion, Date | | oution Numbering, Number | , | 2. · · · · · |
| SCANNER Scan Speed (mono & colour) | & Cover Insertion, Date | Stamp, Proof Print, Distrib | oution Numbering, Number | , | 2. · · · · · |
| SCANNER Scan Speed (mono & colour) Scanning Resolution | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi | Stamp, Proof Print, Distrib | oution Numbering, Number | Stamp, Secure Print, Save ii | 2. · · · · · |
| SCANNER Scan Speed (mono & colour) Scanning Resolution | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; | Stamp, Proof Print, Distrib | DF-624) e); Scan-to-FTP; Scan-to-SM | Stamp, Secure Print, Save ii | 2. · · · · · |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp | DF-624) e); Scan-to-FTP; Scan-to-SM | Stamp, Secure Print, Save ii IB (Scan-to-Home); | n User Box |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB | Stamp, Secure Print, Save ii IB (Scan-to-Home); | n User Box |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB | Stamp, Secure Print, Save ii IB (Scan-to-Home); | n User Box |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB pact PDF ; Encrypted PDF; So | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X | n User Box |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF;A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB pact PDF ; Encrypted PDF; Sc Standard: 1,150 | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 | n User Box PS; Compact XPS; Standard: 1,150 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB pact PDF ; Encrypted PDF; So | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X | n User Box |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB pact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB pact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box, Scan-to-V JPEG; TIFF; PDF; PDF;A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su 1,000-Base-T Ethernet / US | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE iB 2.0 / USB Host | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF;A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (I | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB bact PDF; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm colo | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i pur/mono - 100 originals ; 1 | DF-624) e); Scan-to-FTP; Scan-to-SM (can-to-USB bact PDF; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm cold A5L-SRA3, customised | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Neight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm cold A5L-SRA3, customised | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i pur/mono - 100 originals ; 1 | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Format | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm cold A5L-SRA3, customised | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable Pf 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm cold A5L-SRA3, customised | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape | DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE B 2.0 / USB Host EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX Standard Fax | & Cover Insertion, Date Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPV4 / IPv6); IPX; RADF up to 80 ipm color A5L-SRA3, customised 52-300 g/m ² ; Bypass / 5 Super G3 (optional) | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su I,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape | DF-624) DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm ays | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX Standard Fax Transmission Fax | & Cover Insertion, Date Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPV4 / IPv6); IPX; RADF up to 80 ipm color A5L-SRA3, customised 52-300 g/m ² ; Bypass / 5 Super G3 (optional) | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su 1,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape 52 - 256 g/m ² via paper tra | DF-624) DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm ays | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX Standard Fax Transmission Fax Resolution Fax | & Cover Insertion, Date Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box, Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX/ RADF up to 80 ipm colo A5L-SRA3, customised 52-300 g/m ² ; Bypass / 5 Super G3 (optional) Analogue; i-Fax; Colour | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su 1,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape 52 - 256 g/m ² via paper tra | DF-624) DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm ays | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX Standard Fax Transmission Fax Resolution Fax Compression Fax | & Cover Insertion, Date Max.: 600 x 600 dpi Network TWAIN Scar; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF; PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm coloc A5L-SRA3, customised 52-300 g/m ² ; Bypass / 5 Super G3 (optional) Analogue; i-Fax; Colour Max.: 600 x 600 (ultra- | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su 1,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape 52 - 256 g/m ² via paper tra | DF-624) DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm ays | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |
| Printing Functions SCANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes File Formats Scan Destinations SYSTEM SPECIFICATIONS Paper Feed Capacity System Dimensions (WxDxH) Weight Automatic Duplex System Memory Hard Disk Interface Network Protocols Document Feeder Options Paper Format Paper Density FAX Standard Fax Transmission Fax Resolution Fax Resolution Fax Modem Fax Destinations Fax | & Cover Insertion, Date Up to 160 ipm (with DF Max.: 600 x 600 dpi Network TWAIN Scar; Scan-to-Box; Scan-to-V JPEG; TIFF; PDF, PDF/A PPTX and Searchable PI 2,100 (single + group), Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg A5-SRA3; 52-256 g/m ² 2GB Standard; 4GB ma 250 GB 10-Base-T/100-Base-T/1 TCP/IP (IPv4 / IPv6); IPX, RADF up to 80 ipm cold A5L-SRA3; customised 52-300 g/m ² ; Bypass / 5 Super G3 (optional) Analogue; I-Fax; Colour Max.: 600 x 600 (ultra- | Stamp, Proof Print, Distrib -701) / Up to 80 ipm (with Scan-to-eMail (Scan-to-Me VebDAV; Scan-to-DPWS; S 1a and 1b (optional); Comp PTX (optional) LDAP support Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg x (for intelligent options, su 1,000-Base-T Ethernet / US /SPX; NetBEUI; AppleTalk (i paper format; Banner pape 52 - 256 g/m ² via paper tra | DF-624) DF-624) e); Scan-to-FTP; Scan-to-SM can-to-USB bact PDF ; Encrypted PDF; So Standard: 1,150 Max: 3,650 615 x 685 x 779 mm Approx 85 kg uch as LK-105 searchable PE EtherTalk); SMB; LPD; IPP; SI Dual-scan ADF up to 160 ip er max 1,200 x 297 mm ays | Stamp, Secure Print, Save ii IB (Scan-to-Home); earchable PDF (optional); X Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg DF) | n User Box PS; Compact XPS; Standard: 1,150 Max: 6,650 615 x 685 x 921 mm inc DF-701 Approx 101 kg |

Γ

Product performances are referred to as appropriate use under optimal conditions. The registered trademarks are the property of their respective owners.

The support and availability of the listed specifications and functionalities varies depending upon operating systems, applications, network protocols as well as network and system configurations. All information relating to specification and accessories is subject to change without notice. Olivetti does not guarantee that any prices or specifications mentioned will be error-free

OLIVETTI UK LIMITED. 500 AVEBURY BOULEVARD MILTON KEYNES, MK9 2BE www.olivetti.co.uk

